

PERC MONOCRYSTALLINE 132PM12



- ◆ TT675-132PM12 675 Wp
- ◆ TT670-132PM12 670 Wp
- ◆ TT665-132PM12 665Wp
- ◆ TT660-132PM12 660Wp
- ◆ TT655-132PM12 655 Wp
- ◆ TT650-132PM12 650 Wp



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa





0~+5Wp Positive Power Tolerance



Easy Installation

12BB

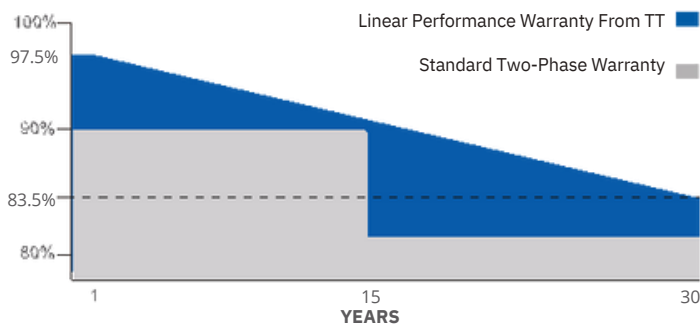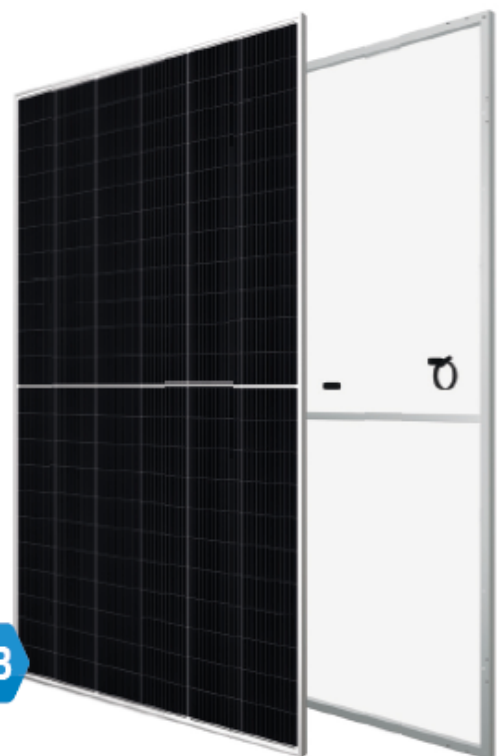

- 30 Years Performance Warranty
- 15 Years Product Warranty



IEC 61215, IEC 61730-1, IEC 61730-2
IEC 61701 SALT MIST CORROSION
IEC 62716 AMMONIA CORROSION
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018



+32 472 32 00 51
info@infogroupglobal.com

Park Lane D- Culliganlaan 2D/8
1831 Diegem Brussels/ BELGIUM

infogroupglobal.com/energy

Model Type	TT650 132PM12	TT655 132PM12	TT660 132PM12	TT665 132PM12	TT670 132PM12	TT675 132PM12
Peak Power (Pmax)	650W	655W	660Wp	665Wp	670W	675W
Module Efficiency	p	p	21.2521.41	37.9038.10	p	p
Maximum Power Voltage (Vmp)	20.92	21.09	17.4217.46	45.6045.80	21.57	21.73
Maximum Power Current (Imp)	37.50	37.70	18.4418.48		38.30	38.50
Open Circuit Voltage (Voc)	17.34	17.38			17.50	17.54
Short Circuit Current (Isc)	45.20	45.40			46.00	46.20
Power Tolerance	18.35	18.39	0~+5W		18.51	18.56
Maximum System Voltage	1500V DC					
Operating Temperature	-40 ~ +85°C					
Fire Safety Class	C					
Maximum Series Fuse Rating	30A					

MECHANICAL SPECIFICATIONS

Cell Dimensions(mm)	210x105
Cells per Module(pcs)	132 (6x22)
Weight(kg)	34.5
Panel Dimensions(mm)	2384x1303x35
Max. Wind/Snow Load(Pa)	2400/5400
Junction Box	IP68
Junction Box Cable Length(mm)	350-1600


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (Isc)	0.040%/°C
Temp. Coeff. of (Voc)	-0.260%/°C
Temp. Coeff. of (Pmax)	-0.340%/°C


PACKING CONFIGURATION

Container	40' GP
Pieces per Pallet	31
Pieces per Container	527
Pallet Per Container	17

PHYSICAL CHARACTERISTICS

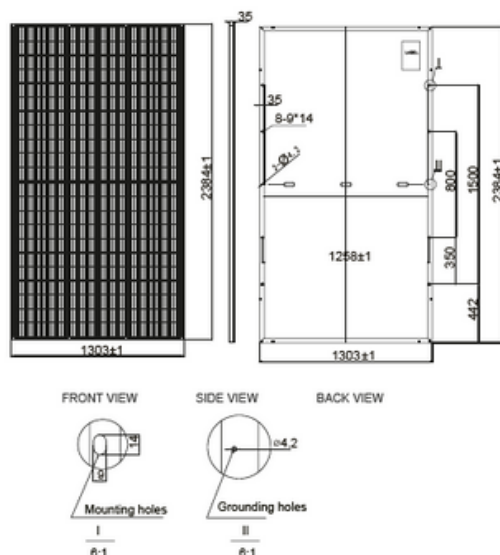

ELECTRICAL CHARACTERISTICS

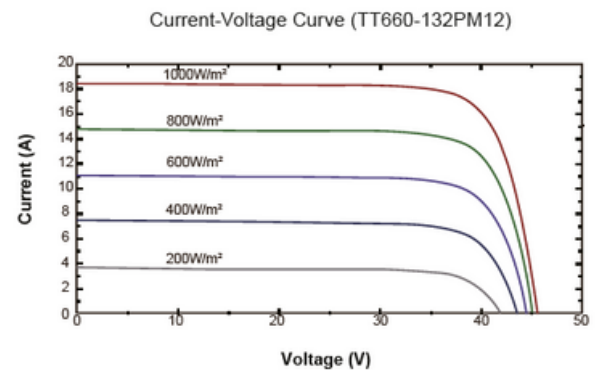

***Note 1:** The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.

***Note 2:** For roof, facades and installations on similar surfaces, solar panels should be mounted over a fire-resistant covering suitable for this application, with adequate ventilation between the back of the solar panels and the mounting surface. Improper installations are hazardous and may spark a fire. Solar panels must not be mounted on structures and roofs which are made of not fire-resistant materials such as plastic layer, transparent plastic or similar materials without any fire-protection layer. Usage and installation not in accordance with the guidelines as outlined in the installation manual will terminate the warranty. Please refer to the installation manual and the warranty documents for further details.