


## STP410S-C54/Nshb

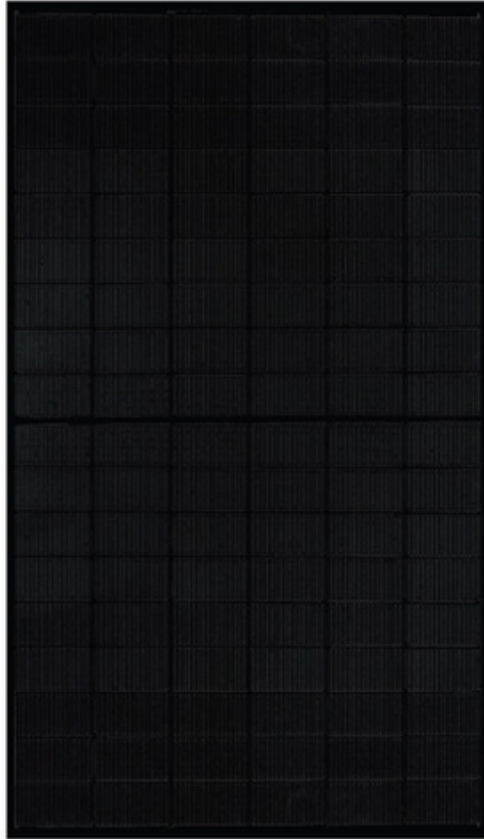

- including cable (ca. 140 cm) and MC4 EVO2 connector system
- stable anodized black alu-frame
- high-performance Topcon solar cells
- version with 16 busbars
- glass thickness 3,2mm

<b>Number of cells along:</b>	<b>18</b>
<b>Lenght of Cables (cm):</b>	<b>140</b>
<b>Number of cells across:</b>	<b>6</b>
<b>Power Rating Pmax (Wp):</b>	<b>410</b>
<b>Power Tolerance:</b>	<b>5,00</b>
<b>Cell width (mm):</b>	<b>182,00</b>
<b>Nominal Voltage Umpp (V):</b>	<b>31,59</b>
<b>Cell length (mm):</b>	<b>91,00</b>
<b>Nominal Current Impp (A):</b>	<b>12,98</b>
<b>Max system voltage (V):</b>	<b>1500</b>
<b>Cell Type:</b>	<b>monocrystalline</b>
<b>Short Circuit Current Isc (A):</b>	<b>13,93</b>
<b>Bifacial:</b>	<b>no</b>
<b>Connector Type:</b>	<b>MC4 Evo 2</b>
<b>Open Circuit Voltage Uoc (V):</b>	<b>38,20</b>
<b>Temperature Coefficient Isc (%/K):</b>	<b>0,05</b>
<b>Frametype:</b>	<b>standard</b>
<b>Temperature Coefficient Pmpp (%/K):</b>	<b>-0,30</b>
<b>Temperature Coefficient Uoc (%/K):</b>	<b>-0,25</b>

<b>Height (mm):</b>	<b>30</b>
<b>Length (mm):</b>	<b>1722</b>
<b>Weight (kg):</b>	<b>21,00</b>
<b>Width (mm):</b>	<b>1134</b>