

AXIperfect FXXL WB

415 - 430 Wp

High performance solar module
108 halfcell, N-Type TOPCon

The advantages:

- 15 Years** 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100 % visual electroluminescence inspection in production
- Frame** High stability due to innovative frame design
- IP 68** High quality junction box and connector systems
- TOP** More performance through innovative N-Type TOPCon-Technology
- 25 Years** 25 years Performance guarantee


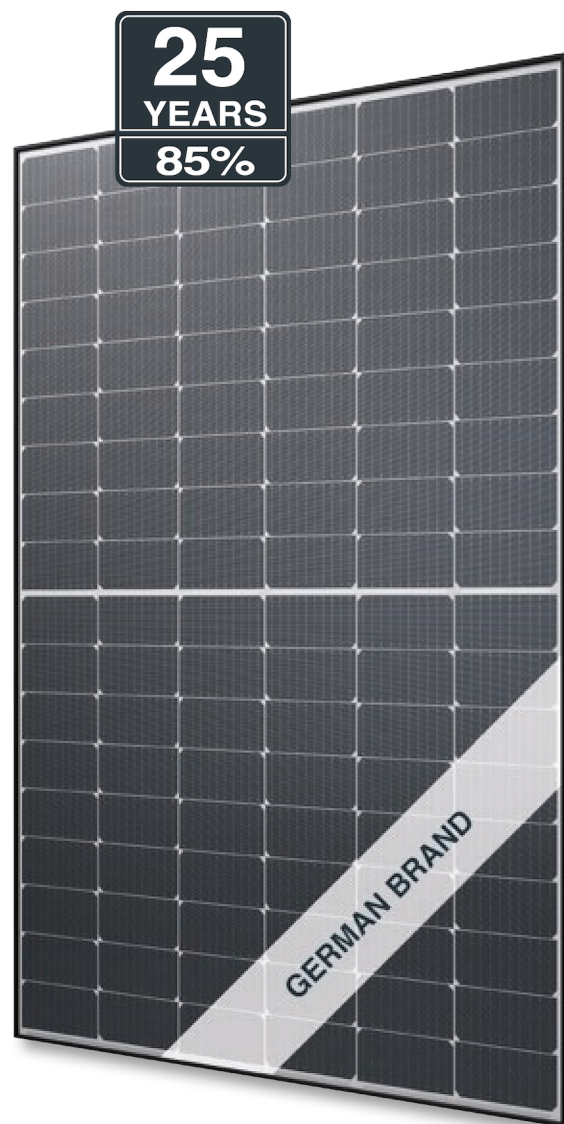


Fig. similar 08TFMEN230104A

Exclusive linear AXITEC high performance guarantee!

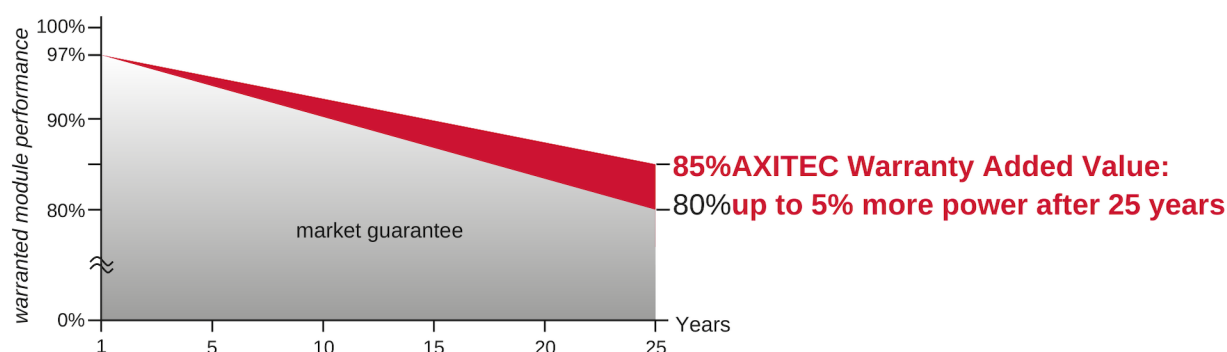

AXIperfect FXXL WB 415 - 430 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-415TFM/108WB 415 Wp	31.32 V	13.26 A	13.99 A	37.92 V	21.25 %
AC-420TFM/108WB 420 Wp	31.51 V	13.33 A	14.07 A	38.11 V	21.51 %
AC-425TFM/108WB 425 Wp	31.70 V	13.41 A	14.15 A	38.30 V	21.76 %
AC-430TFM/108WB 430 Wp	31.88 V	13.49 A	14.23 A	38.49 V	22.02 %

Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	108 N-Type TOPCon high efficiency cells
Backside	Composite film
Frame	30 mm black aluminium frame

Mechanical data

L x W x H	1722 x 1134 x 30 mm
Weight	21.8 kg with frame

Mechanical load

Design load (pressure/suction) 3600 Pa / 1600 Pa
Test load (pressure/suction) 5400 Pa / 2400 Pa

Power connection

Socket	Protection Class IP68
Wire	approx. 1.2 m, 4 mm ²
Plug-in system	Plug/socket IP68, Stäubli EVO2 / EVO2 pluggable


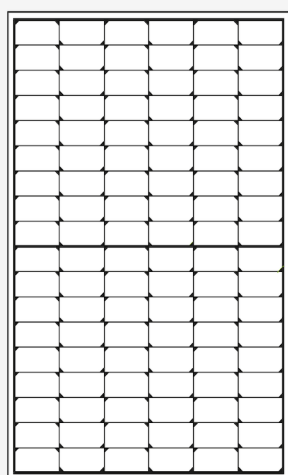


Fig. principle sketch

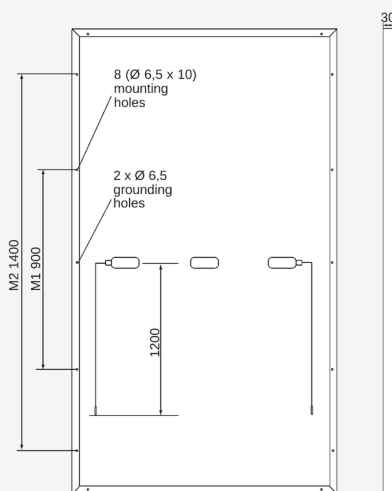

All dimensions in mm

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature -40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.26 %/K
Current I _{sc}	0.047 %/K
Output P _{mpp}	-0.31 %/K

Low-light performance (Example for AC-430TFM/108WB) I-U characteristic curve Current I_{pp}

Voltage U _{pp}	
200 W/m ²	2.76 A 30.68 V
400 W/m ²	5.56 A 31.04 V
600 W/m ²	8.31 A 31.28 V
800 W/m ²	10.99 A 31.55 V
1000 W/m ²	13.49 A 31.88 V

Packaging

Module pieces per pallet	36
Module pieces per HC-container	936

